

BC – How to configure Active Directory Authentication



Oude Oeverstraat 120-4
6811 JZ
Arnhem
The Netherlands

t: +31(0) 88 1221 800
f: +31(0) 88 1221 899
www.rsconnect.net
info@rsconnect.net

How to configure Active Directory Authentication within the Business Connector

This How-To guide explains how to configure Active Directory support for the Business Connector.


If the CUCM is configured to accept the Windows login name as the userID during EM authentication, then BC requires an additional application user to be created in CUCM.

For additional information please contact support@rsconnect.net


Required CUCM configuration

This step explains how to configure one generic Application User in CUCM with permissions to allow 3rd party non-Cisco applications like the Business Connector to login users via the Extension Mobility API.

- a) Login to the CUCM admin page
- b) Open User Management/Application User

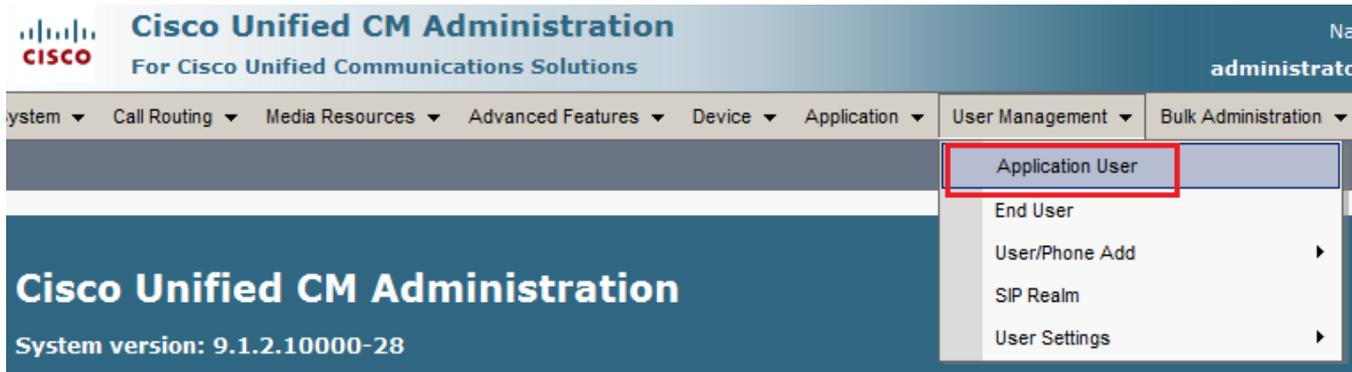

- c) Click Add new user

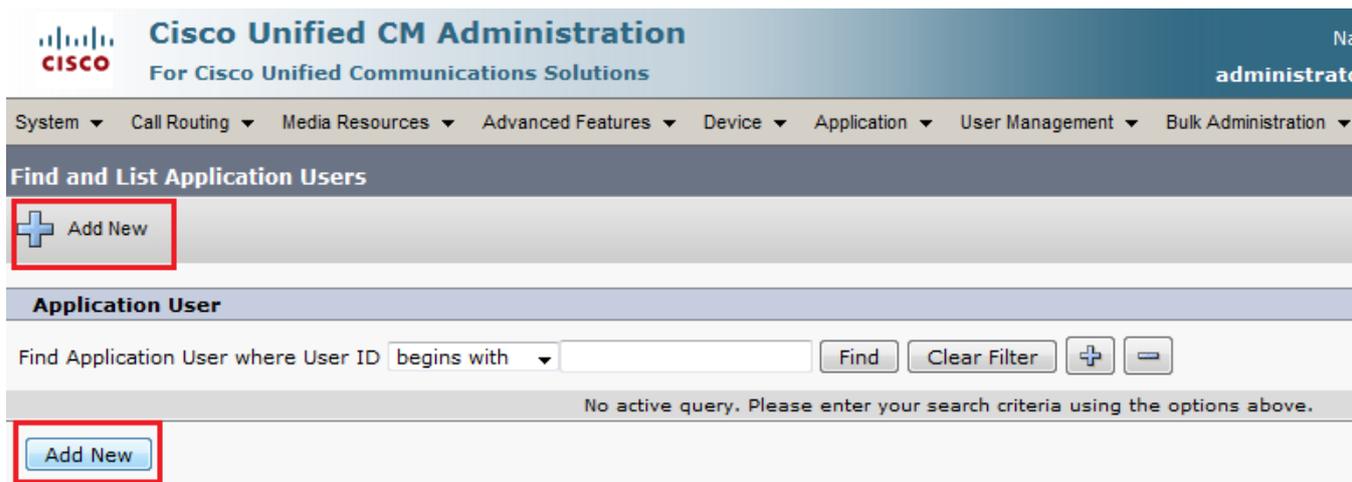

- d) Create a User ID and an App Password and grant the user the "Standard EM Authentication Proxy rights" group. Remember the chosen user ID and App password, this will be used when configuring the Business Connector.

Application Username	almappuser
Application Password	

Cisco Unified CM Administration
For Cisco Unified Communications Solutions

System ▾ Call Routing ▾ Media Resources ▾ Advanced Features ▾ Device ▾ Application ▾ User Management ▾ Bulk Administration ▾

Application User Configuration

Save **X** Delete Copy + Add New

Status
Status: Ready

Application User Information

User ID* **Edit Credential**

Password

Confirm Password

Digest Credentials

Confirm Digest Credentials

BLF Presence Group*

Accept Presence Subscription

Accept Out-of-dialog REFER

Accept Unsolicited Notification

Accept Replaces Header

e) Add the AppUser to the "Standard EM Authentication Proxy Rights" Access Control Group

Find and List Access Control Groups

Select All Clear All Add Selected Close

- Standard CCM Server Monitoring
- Standard CCM Super Users
- Standard CTI Allow Call Monitoring
- Standard CTI Allow Call Park Monitoring
- Standard CTI Allow Call Recording
- Standard CTI Allow Calling Number Modification
- Standard CTI Allow Control of All Devices
- Standard CTI Allow Control of Phones supporting Connected Xfer and conf
- Standard CTI Allow Control of Phones supporting Rollover Mode
- Standard CTI Allow Reception of SRTP Key Material
- Standard CTI Enabled
- Standard CTI Secure Connection
- Standard EM Authentication Proxy Rights**
- Standard Packet Sniffer Users
- Standard RealtimeAndTraceCollection
- Standard TabSync User

Select All Clear All Add Selected Close

Permissions Information

Groups [View Details](#)

Roles [View Details](#)

Add to Access Control Group

Remove from Access Control Group

Save Delete Copy Add New

Additional Information

For additional information please contact us or visit:

- United Kingdom: +44 203 608 8259
- Other countries: +31 88 1221 800
- <http://www.rsconnect.net>
- sales@rsconnect.net